






# Flat - V DESIGN ANDREA CROSETTA

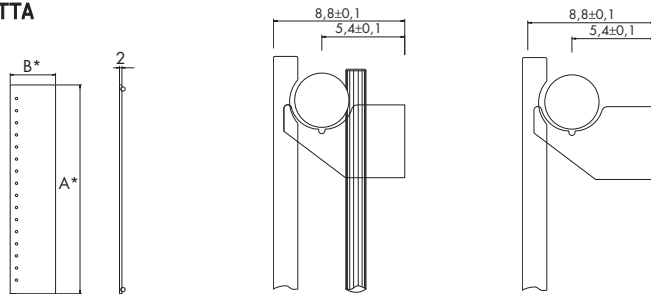


**[X]** attacco standard  
standard connection  
raccord standard  
standard Anschluss  
conexión estándar

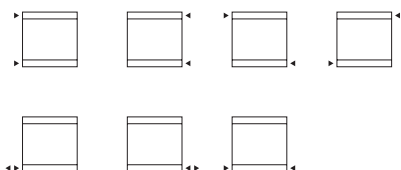

**[B]** attacco speciale  
special connection  
raccord spéciale  
speziell Anschluss  
conexión especial



**[B5]** attacco interasse 5 cm  
pipe centres 5 cm  
raccords 5 cm  
5 cm Achsabstand Anschluss  
conexión entre ejes: 5 cm.



P\* 320

| A* cm   | in   | B* cm | in   | l* cm | in   | l* cm | in   | art*           | BTU Δt 50° | watt Δt 50° |
|---|------|-------|------|-------|------|-------|------|----------------|------------|-------------|
| <b>verticale / vertical / verticale / vertikal / vertical</b> |      |       |      |       |      |       |      |                |            |             |
| 172.5   | 67.9 | 37.5  | 14.8 | 45.8  | 18.0 | 166   | 65.4 | FL13000S170015 | 2 038      | 598         |
| 172.5   | 67.9 | 49.5  | 19.5 | 57.8  | 22.8 | 166   | 65.4 | FL13000S170020 | 2 717      | 797         |
| 172.5   | 67.9 | 66.3  | 26.1 | 74.6  | 29.4 | 166   | 65.4 | FL13000S170027 | 3 669      | 1 076       |
| 202.5   | 79.7 | 37.5  | 14.8 | 45.8  | 18.0 | 196   | 77.2 | FL13000S200015 | 2 365      | 694         |
| 202.5   | 79.7 | 49.5  | 19.5 | 57.8  | 22.8 | 196   | 77.2 | FL13000S200020 | 3 154      | 925         |
| 202.5   | 79.7 | 66.3  | 26.1 | 74.6  | 29.4 | 196   | 77.2 | FL13000S200027 | 4 258      | 1 24        |

| <b>verticale doppio / double vertical / double verticale / doppelte vertikal / vertical doble</b> |      |      |      |      |      |     |      |                |       |       |
|---|------|------|------|------|------|-----|------|----------------|-------|-------|
| 172.5   | 67.9 | 37.5 | 14.8 | 45.8 | 18.0 | 166 | 65.4 | FL13000D170015 | 3 058 | 897   |
| 172.5   | 67.9 | 49.5 | 19.5 | 57.8 | 22.8 | 166 | 65.4 | FL13000D170020 | 4 076 | 1 195 |
| 172.5   | 67.9 | 66.3 | 26.1 | 74.6 | 29.4 | 166 | 65.4 | FL13000D170027 | 5 502 | 1 614 |
| 202.5   | 79.7 | 37.5 | 14.8 | 45.8 | 18.0 | 196 | 77.2 | FL13000D200015 | 3 541 | 1 038 |
| 202.5   | 79.7 | 49.5 | 19.5 | 57.8 | 22.8 | 196 | 77.2 | FL13000D200020 | 4 719 | 1 384 |
| 202.5   | 79.7 | 66.3 | 26.1 | 74.6 | 29.4 | 196 | 77.2 | FL13000D200027 | 6 373 | 1 869 |

| <b>INOX</b>   |      |       |      |       |      |       |      |                 |            |             |
|---|------|-------|------|-------|------|-------|------|-----------------|------------|-------------|
| A* cm   | in   | B* cm | in   | l* cm | in   | l* cm | in   | art*            | BTU Δt 50° | watt Δt 50° |
| <b>verticale / vertical / verticale / vertikal / vertical</b> |      |       |      |       |      |       |      |                 |            |             |
| 172.5   | 67.9 | 37.5  | 14.8 | 45.8  | 18.0 | 166   | 65.4 | FL13000S170015X | 1 910      | 560         |
| 172.5   | 67.9 | 49.5  | 19.5 | 57.8  | 22.8 | 166   | 65.4 | FL13000S170020X | 2 547      | 747         |
| 172.5   | 67.9 | 66.3  | 26.1 | 74.6  | 29.4 | 166   | 65.4 | FL13000S170027X | 3 440      | 1 009       |
| 202.5   | 79.7 | 37.5  | 14.8 | 45.8  | 18.0 | 196   | 77.2 | FL13000S200015X | 2 217      | 650         |
| 202.5   | 79.7 | 49.5  | 19.5 | 57.8  | 22.8 | 196   | 77.2 | FL13000S200020X | 2 956      | 867         |
| 202.5   | 79.7 | 66.3  | 26.1 | 74.6  | 29.4 | 196   | 77.2 | FL13000S200027X | 3 992      | 1 171       |

A\* = altezza / height / hauteur / Höhe / alto B\* = larghezza / width / longueur / Breite / ancho art\* = articolo / model / modèle / Artikel / artículo P\* = pagina / page / page / Seite / página  
l\* = interasse / pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones



Ulteriori dettagli  
Further details  
Ulérieures détails  
Weitere Einzelheiten  
Otros detalles


Colori/ colours / couleurs / Farbe / colores  
[ BIAN ] B standard  
T + 10%  
S + 20%  
[ RAL ] S + 20% RAL non inclusi in tabella / special Ral colours / couleurs Ral spéciales / RAL Farbe nicht in der Tabelle inbegriffen / colores RAL especiales  
INOX

Kcal = Watt x 0,860  
BTU = Watt x 3,413


Watt Δt 60° = Watt Δt 50° x 1,267  
Watt Δt 40° = Watt Δt 50° x 0,749  
Watt Δt 30° = Watt Δt 50° x 0,516  
Watt Δt 20° = Watt Δt 50° x 0,305

p max = 10.0 bar


P\* 318

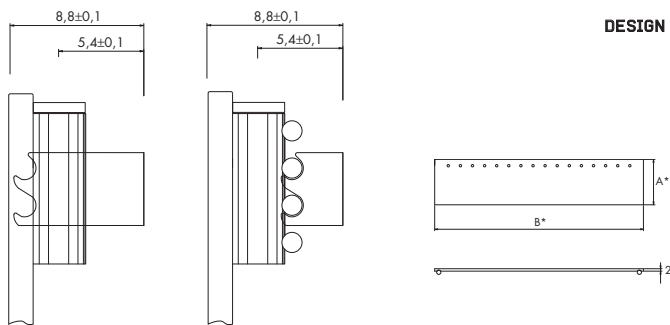DESIGN ANDREA CROSETTA **Flat - O**


**[X]** attacco standard  
standard connection  
raccord standard  
standard Anschluss  
conexión estándar

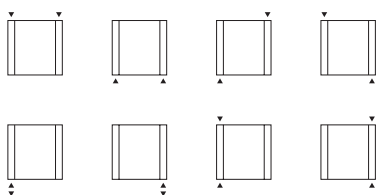

**[B]** attacco speciale  
special connection  
raccord spéciale  
speziell Anschluss  
conexión especial



**[B5]** attacco interasse 5 cm  
pipe centres 5 cm  
raccords 5 cm  
5 cm Achsabstand Anschluss  
conexión entre ejes: 5 cm.



P\* 320

| B* cm   | in   | A* cm | in   | l* cm | in   | l* cm | in   | art*            | BTU Δt 50° | watt Δt 50° |
|---|------|-------|------|-------|------|-------|------|-----------------|------------|-------------|
| <b>orizzontale / horizontal / horizontale / horizontal / horizontal</b>                                     |      |       |      |       |      |       |      |                 |            |             |
| 172.5   | 67.9 | 37.5  | 14.8 | 45.8  | 18.0 | 166   | 65.4 | FO13000S170015  | 2 234      | 655         |
| 172.5   | 67.9 | 49.5  | 19.5 | 57.8  | 22.8 | 166   | 65.4 | FO13000S170020  | 2 976      | 873         |
| 172.5   | 67.9 | 66.3  | 26.1 | 74.6  | 29.4 | 166   | 65.4 | FO13000S170027  | 4 018      | 1 178       |
| 202.5   | 79.7 | 37.5  | 14.8 | 45.8  | 18.0 | 196   | 77.2 | FO13000S200015  | 2 627      | 770         |
| 202.5   | 79.7 | 49.5  | 19.5 | 57.8  | 22.8 | 196   | 77.2 | FO13000S200020  | 3 503      | 1 027       |
| 202.5   | 79.7 | 66.3  | 26.1 | 74.6  | 29.4 | 196   | 77.2 | FO13000S200027  | 4 728      | 1 386       |
| <b>orizzontale doppio / double horizontal / double horizontale / doppelte horizontal / horizontal doble</b> |      |       |      |       |      |       |      |                 |            |             |
| 172.5   | 67.9 | 37.5  | 14.8 | 45.8  | 18.0 | 166   | 65.4 | FO13000D170015  | 3 740      | 1 097       |
| 172.5   | 67.9 | 49.5  | 19.5 | 57.8  | 22.8 | 166   | 65.4 | FO13000D170020  | 5 115      | 1 500       |
| 172.5   | 67.9 | 66.3  | 26.1 | 74.6  | 29.4 | 166   | 65.4 | FO13000D170027  | 6 424      | 1 884       |
| 202.5   | 79.7 | 37.5  | 14.8 | 45.8  | 18.0 | 196   | 77.2 | FO13000D200015  | 4 400      | 1 290       |
| 202.5   | 79.7 | 49.5  | 19.5 | 57.8  | 22.8 | 196   | 77.2 | FO13000D200020  | 6 018      | 1 765       |
| 202.5   | 79.7 | 66.3  | 26.1 | 74.6  | 29.4 | 196   | 77.2 | FO13000D200027  | 7 557      | 2 216       |
| <b>INOX</b>   |      |       |      |       |      |       |      |                 |            |             |
| B* cm   | in   | A* cm | in   | l* cm | in   | l* cm | in   | art*            | BTU Δt 50° | watt Δt 50° |
| <b>orizzontale / horizontal / horizontale / horizontal / horizontal</b>                                     |      |       |      |       |      |       |      |                 |            |             |
| 172.5   | 67.9 | 37.5  | 14.8 | 45.8  | 18.0 | 166   | 65.4 | FO13000S170015X | 2 095      | 614         |
| 172.5   | 67.9 | 49.5  | 19.5 | 57.8  | 22.8 | 166   | 65.4 | FO13000S170020X | 2 790      | 818         |
| 172.5   | 67.9 | 66.3  | 26.1 | 74.6  | 29.4 | 166   | 65.4 | FO13000S170027X | 3 767      | 1 105       |
| 202.5   | 79.7 | 37.5  | 14.8 | 45.8  | 18.0 | 196   | 77.2 | FO13000S200015X | 2 463      | 722         |
| 202.5   | 79.7 | 49.5  | 19.5 | 57.8  | 22.8 | 196   | 77.2 | FO13000S200020X | 3 284      | 963         |
| 202.5   | 79.7 | 66.3  | 26.1 | 74.6  | 29.4 | 196   | 77.2 | FO13000S200027X | 4 432      | 1 300       |

A\* = altezza / height / hauteur / Höhe / alto B\* = larghezza / width / longueur / Breite / ancho art\* = articolo / model / modèle / Artikel / artículo P\* = pagina / page / page / Seite / página  
l\* = interasse / pipe centres / distance entre départ et retour / Achsabstand / distancia entre las conexiones

Kcal = Watt x 0,860  
BTU = Watt x 3,413

Watt Δt 60° = Watt Δt 50° x 1,267  
Watt Δt 40° = Watt Δt 50° x 0,749  
Watt Δt 30° = Watt Δt 50° x 0,516  
Watt Δt 20° = Watt Δt 50° x 0,305

p max = 10.0 bar

Colori / colours / couleurs / Farbe / colores

[ BIAN ] B standard

T + 10%

S + 20%

[ RAL ] S + 20% RAL non inclusi in tabella / special Ral colours / couleurs Ral spéciales / RAL Farbe nicht in der Tabelle inbegriffen / colores RAL especiales

INOX

Ulteriori dettagli  
Further details  
Ulérieures détails  
Weitere Einzelheiten  
Otros detalles



P\* 318